
#### **BRACKET KIT INSTALLATION**

SKU# RB-0303-BK



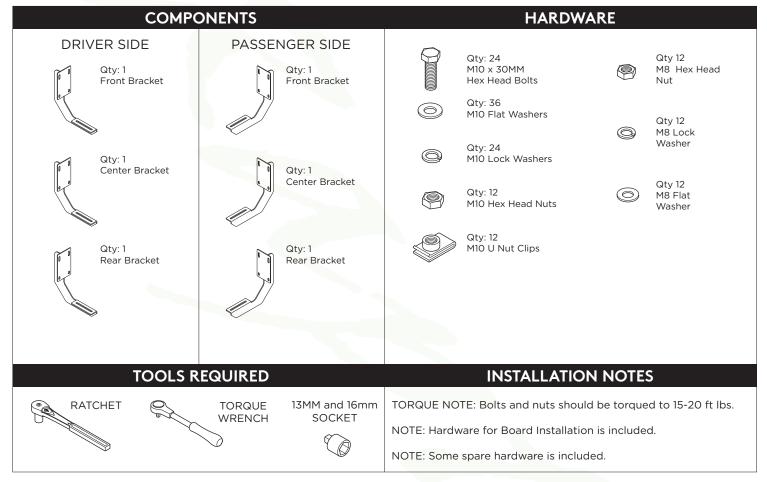


Remove all contents from the package and check brackets for any damage. Also, verify that all components and hardware listed above are included before you begin installation. If anything is missing or damaged please contact us at customerservice@cyc-engineering.com

Read through entire installation manual and installation drawings to ensure that you understand all of the components and hardware before proceeding with installation.

NOTE: When installing the brackets, all hardware must be left loose until all of the items are attached.


Locate factory hole locations in three (3) places per side on the body mount.

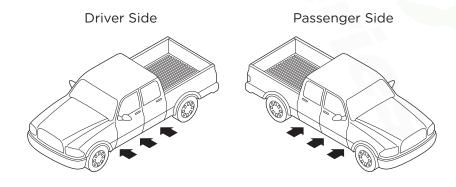




1. Begin installation on driver side. Position the Front Bracket, Center Bracket and Rear Bracket as shown in diagram.


2. Driver Side Front Bracket cradle (2a), Driver Side Front Center cradle (2b) and Driver Side Rear Bracket cradle (2c) will face toward the front of the truck.



Driver Side Front Bracket



Driver Side Center Bracket




Driver Side Rear Bracket


### U-NUT/BRACKET INSTALLATION

**DRIVER SIDE** 




**3.** Insert first M10 U-Nut Clip into rectangular hole in rocker panel, making sure the treads are on the inside of the rocker panel (3a). Insert second M10 U-Nut Clip into rectangular hole in rocker panel, making sure the treads are on the inside of the rocker panel (3b).






**4.** Fasten the top portion of the Driver Side Front, Center and Rear Brackets by using (2) M8 x 30 MM Hex Head Bolts, (2) M8 Flat Washers and (2) M8 Lock Washers per bracket.

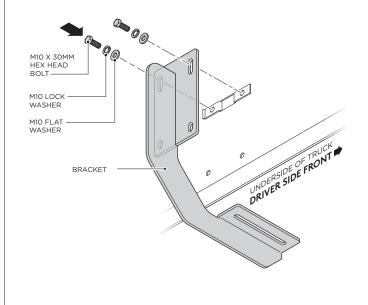


5. Fasten the lower portion of the Driver Side Front, Center and Rear Brackets by using (2) M8 x 30 MM Hex Head Bolts, (4) M8 Flat Washers, (2) M8 Lock Washers and (2) Hex Head Nuts per bracket.

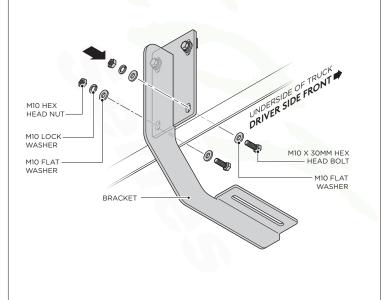

# **RUNNING BOARD INSTALLATION**


**DRIVER SIDE** 



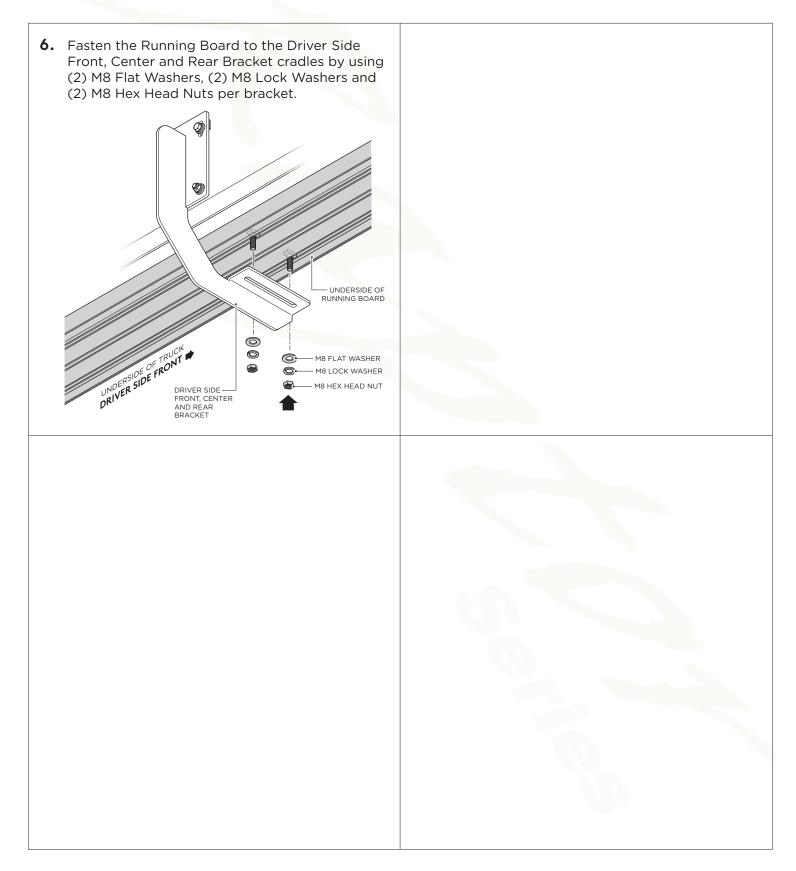





**1.** Begin installation on passenger side. Position the Front Bracket, Center Bracket and Rear Bracket as shown in diagram.

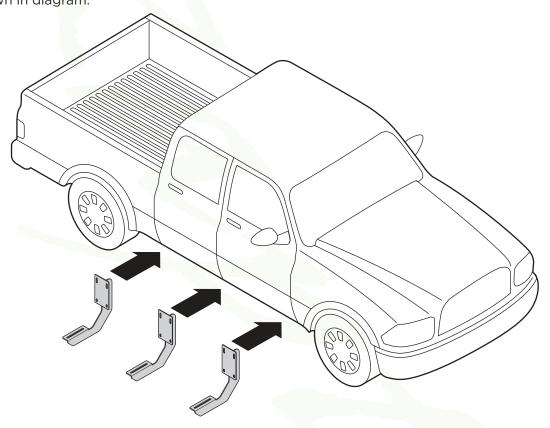


**2.** Passenger Side Front Bracket cradle (2a), Passenger Side Center Bracket cradle (2b), and Passenger Side Rear Bracket cradle (2c) will face toward the rear of the truck.



Passenger Side Front Bracket



Passenger Side Center Bracket




Passenger Side Rear Bracket


### U-NUT/BRACKET INSTALLATION

PASSENGER SIDE




**3.** Insert first M10 U-Nut Clip into rectangular hole in rocker panel, making sure the treads are on the inside of the rocker panel (3a). Insert second M10 U-Nut Clip into rectangular hole in rocker panel, making sure the treads are on the inside of the rocker panel (3b).






**4.** Fasten the top portion of the Passenger Side Front, Center and Rear Brackets by using (2) M8 x 30 MM Hex Head Bolts, (2) M8 Flat Washers and (2) M8 Lock Washers per bracket.

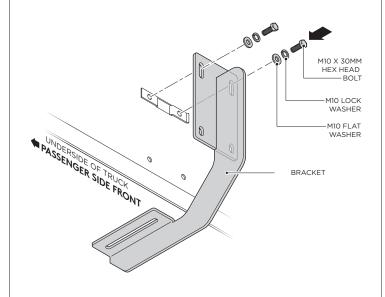

5. Fasten the lower portion of the Passenger Side Front, Center and Rear Brackets by using (2) M8 x 30 MM Hex Head Bolts, (4) M8 Flat Washers, (2) M8 Lock Washers and (2) Hex Head Nuts per bracket.

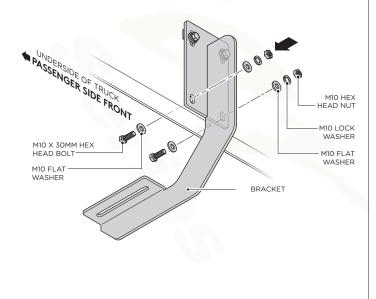

## **RUNNING BOARD INSTALLATION**

PASSENGER SIDE



