

INSTALLATION NOTES

PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED!


If you intend to do this installation yourself, please use extreme caution when working under a vehicle that is supported with jack stands. Serious injury or death can occur.

Read through entire installation manual to ensure that you understand all of the steps before proceeding with installation. If these instructions are not properly followed, severe frame, suspension, and tire damage may occur. Product failure or vehicle damage caused by improper installation will not be covered under warranty!

Remove all contents from the package and inspect for any damage. Also, verify that all components listed are included before you begin installation. If anything is missing or damaged please contact us at customerservice@cyc-engineering.com - IMPORTANT: DO NOT INSTALL DAMAGED PARTS!

COMPONENTS


Qty 2: Adjustable Front Upper Control Arms

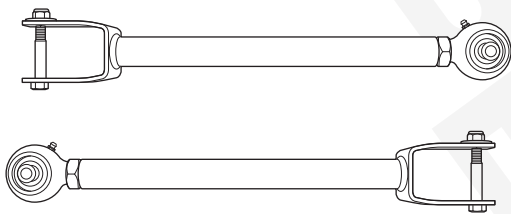


TOOLS REQUIRED




Jack Stands




Adjustable Wrench




10mm, 21mm Socket



Torque Wrench



Jack




Tape Measure

ADJUSTABLE FRONT UPPER CONTROL ARMS

SKU# 170107-459801

RSO SUSPENSION



1. Chock your rear tires and then raise the front tires off the ground using a properly rated jack and jack stands. Ensure the vehicle is properly supported then remove the front tires.

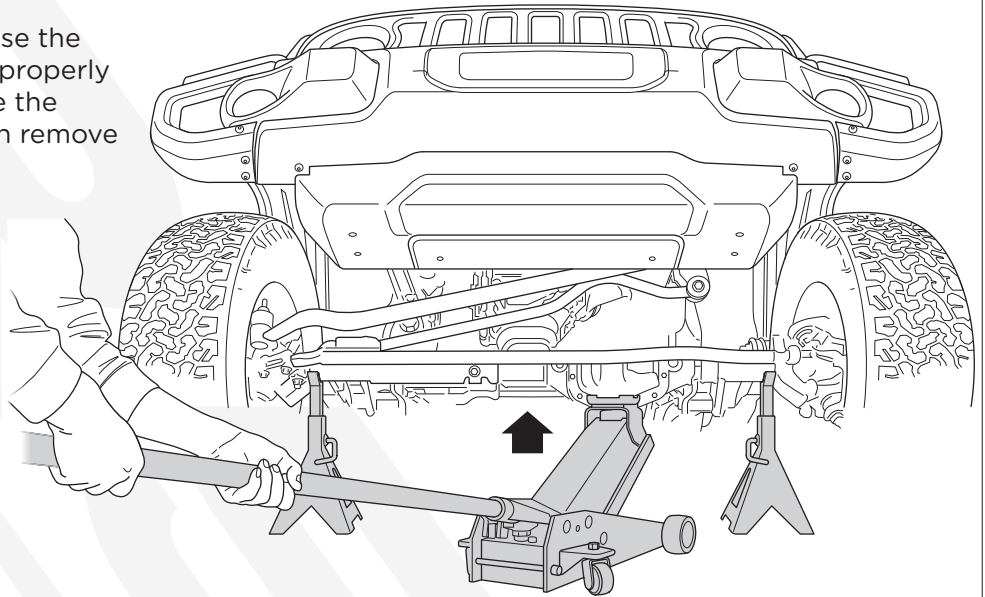

2. Use a hydraulic jack to raise the axle and remove any tension on the front suspension. Remove any electrical connections clipped onto the upper control arm clevis if equipped. Use a 10mm socket to remove the heat shields covering the upper control arm to frame side mounts, retain the heat shields and hardware as they will be reused during installation. Use a 21mm socket to remove the factory bolt on the frame and axle side mounts.. Notate the orientation of the factory upper control arm hardware as it will be reused for installation of the RSO Front Upper Control Arms.

3. Before placing control arms in mounting position, you'll need to adjust them to our suggested base length. For 2.5" Lifts we recommend 19" & For 4" Lift we recommend 19.5". Leave the jam nut loose and place the RSO control arms into the axle side and frame side control arm mounts. Loosely attach the factory hardware but do not torque down until all adjustments are completed.

4. The Adjustable Front Upper Control Arms should be positioned to where the flat side of the fork that attaches to the axle mount is facing down and the sloped side facing up. Hand tighten the original hardware to mount each end of the control arms. Once both control arms have been properly installed, lower the vehicle to the ground until the coil springs are supporting the full weight of the vehicle. Hand tighten the factory control arm mounting bolts and do not torque until all adjustments are final.

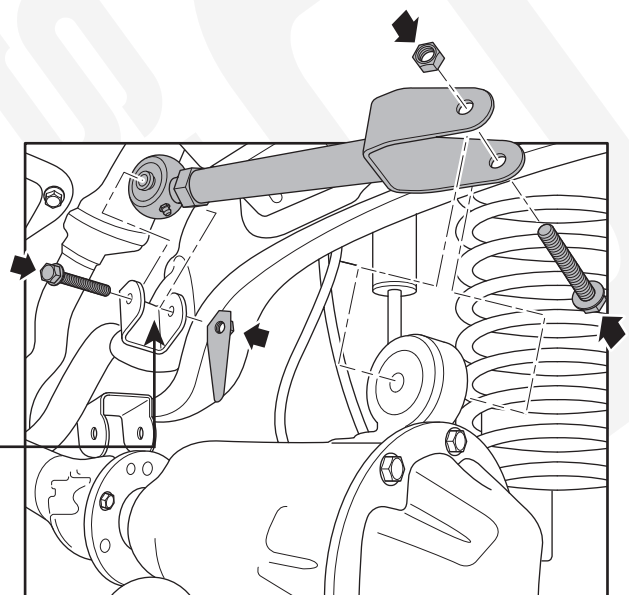

ADJUSTABLE FRONT UPPER CONTROL ARMS

SKU# 170107-459801

RSO
SUSPENSION

5. Measure both sides of the vehicle to ensure the axle position matches. Measure the caster angle to ensure it is within factory specs, you can adjust the length of the control arms to get more or less caster angle. We recommend setting the caster between 4-5 degrees for optimal driving experience. Once you have determined caster and axle position are within spec, tighten the jam nut using a large adjustable wrench and torque to 55ft/lbs. With the vehicle still on the ground supporting it's own weight use a 21mm socket and wrench to torque the frame and axle side hardware to 75ft/lbs. Clip the electrical harness back onto the control arm clevis if equipped. Reinstall the heat shields over the frame side mounts of the upper controls arms and torque to 40 in/lbs.
6. We now recommend a professional alignment. Check all hardware after 100 miles of driving and retorquer as necessary.

REGULAR MAINTENANCE SCHEDULE

Control Arms are serviceable, however the ball and socket joints are a consumable component. See Signs of Wear below for more information.

For the ball and socket joints, a visual inspection at every oil change is recommended to detect any accumulation of dirt, debris or moisture.

CLEANING & LUBRICATION

Should dirt accumulate on the ball or race, wipe clean with a rag.

We recommend regreasing the joints every 10,000 miles.

SIGNS OF WEAR

Excessive back and forth play or rattling in the joints indicates wear. In such instances, it is imperative to replace the affected parts promptly. You can order replacement parts at www.cyc-engineering.com

Replacement Part numbers for this particular SKU are listed below for your reference.

SKU: REP-BNSJOINT-1-KIT (Replacement Ball & Socket Joints)

TECHNICAL NOTES

INSTALLATION NOTES

PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED!


If you intend to do this installation yourself, please use extreme caution when working under a vehicle that is supported with jack stands. Serious injury or death can occur.

Read through entire installation manual to ensure that you understand all of the steps before proceeding with installation. If these instructions are not properly followed, severe frame, suspension, and tire damage may occur. Product failure or vehicle damage caused by improper installation will not be covered under warranty!

Remove all contents from the package and inspect for any damage. Also, verify that all components listed are included before you begin installation. If anything is missing or damaged please contact us at customerservice@cyc-engineering.com - IMPORTANT: DO NOT INSTALL DAMAGED PARTS!

COMPONENTS


Qty 2: Adjustable Front Lower Control Arms

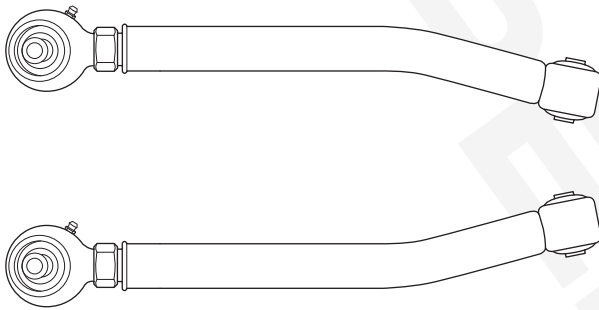


TOOLS REQUIRED




Jack Stands




Adjustable Wrench




21mm Socket



Torque Wrench



Jack




Tape Measure

ADJUSTABLE FRONT LOWER CONTROL ARMS

SKU# 170107-459802

RSO SUSPENSION


1. Chock your rear tires and then raise the front tires off the ground using a properly rated jack and jack stands. Ensure the vehicle is properly supported then remove the front tires.

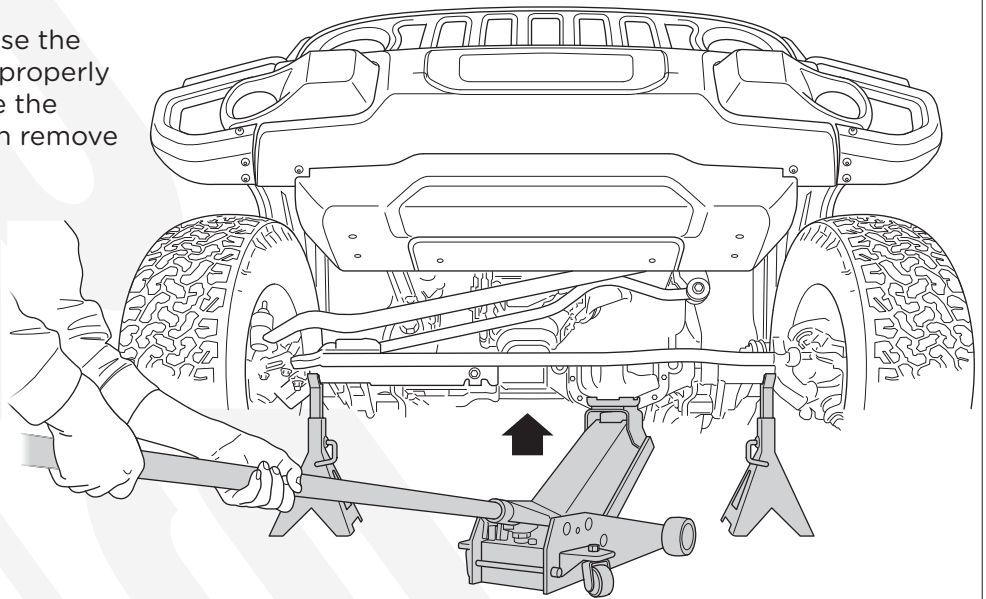

2. Use a hydraulic jack to raise the axle and remove any tension on the front suspension. Use a 21mm socket to remove the factory hardware from the axle side and frame side of the control arm mounts. Retain the factory hardware as it will be reused for installation of the new RSO Adjustable Front Lower Control Arms.

3. Before placing control arms in mounting position, you'll need to adjust them to our suggested base length. For 2.5" Lifts we recommend 22.75" & For 4" Lift we recommend 23.25". Leave the jam nut loose and place the RSO control arms into the axle side and frame side control arm mounts. Loosely attach the factory hardware but do not torque down until all adjustments are completed.

4. The Adjustable Front Lower Control Arms should be positioned to where the bend in the arm goes towards the inside of the vehicle. The fixed end will mount to the axle while the adjustable end will be attached to the frame mount. Hand tighten the original hardware to mount each end of the control arms. Once both control arms have been properly installed, lower the vehicle to the ground until the coil springs are supporting the full weight of the vehicle. Hand tighten the factory control arm mounting bolts and do not torque until all adjustments are final.

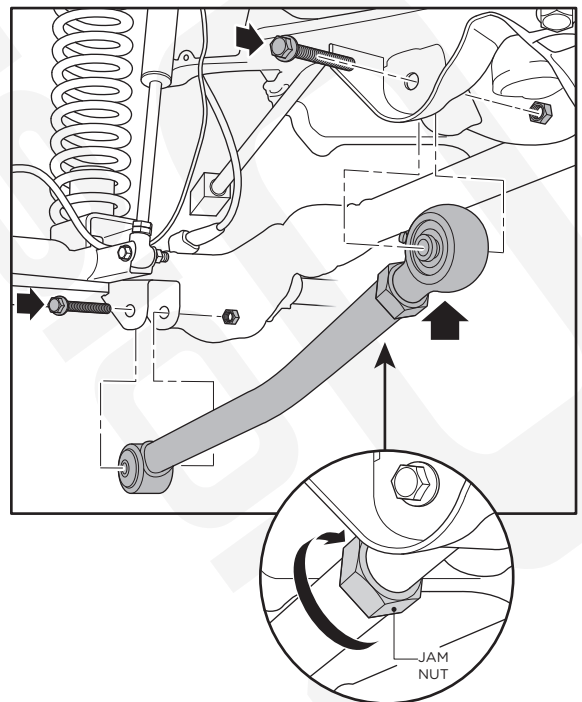

ADJUSTABLE FRONT LOWER CONTROL ARMS

SKU# 170107-459802

RSO
SUSPENSION

5. Measure both sides of the vehicle to ensure the axle position matches. Measure the caster angle to ensure it is within factory specs, you can adjust the length of the control arms to get more or less caster angle. We recommend setting the caster between 4-5 degrees for optimal driving experience. Once you have determined caster and axle position are within spec, tighten the jam nut using a large adjustable wrench and then torque to 75ft/lbs using a torque wrench. With the vehicle still on the ground supporting its own weight use a 21mm socket and wrench to torque the frame side hardware to 125ft/lbs and the axle side hardware to 117ft/lbs.
6. We now recommend a professional alignment. Check all hardware after 100 miles of driving and retorque as necessary.

REGULAR MAINTENANCE SCHEDULE

Control Arms are essentially maintenance free, however the bushings and the ball and socket joints are a consumable component. See Signs of Wear below for more information.

For the bushings, a visual inspection at every oil change is recommended to detect any accumulation of dirt or debris.

For the ball and socket joints, a visual inspection at every oil change is recommended to detect any accumulation of dirt, debris or moisture.

CLEANING & LUBRICATION

Should dirt accumulate on the bushings, wipe clean with a rag.

We recommend regreasing the joints every 10,000 miles.

SIGNS OF WEAR

Excessive back and forth play or rattling in the bushings and/or joints indicates wear. In such instances, it is imperative to replace the affected parts promptly. You can order replacement parts at www.cyc-engineering.com

Replacement Part numbers for this particular SKU are listed below for your reference.

SKU: REP-BUSHING-8-KIT (Replacement Rubber Bushings)

SKU: REP-BNSJOINT-2-KIT (Replacement Ball & Socket Joints)

TECHNICAL NOTES

INSTALLATION NOTES

PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED!


If you intend to do this installation yourself, please use extreme caution when working under a vehicle that is supported with jack stands. Serious injury or death can occur.

Read through entire installation manual to ensure that you understand all of the steps before proceeding with installation. If these instructions are not properly followed, severe frame, suspension, and tire damage may occur. Product failure or vehicle damage caused by improper installation will not be covered under warranty!

Remove all contents from the package and inspect for any damage. Also, verify that all components listed are included before you begin installation. If anything is missing or damaged please contact us at customerservice@cyc-engineering.com - IMPORTANT: DO NOT INSTALL DAMAGED PARTS!

COMPONENTS


Qty 2: Adjustable Rear Upper Control Arms

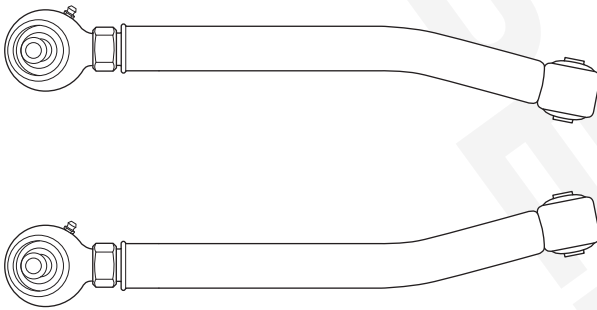


TOOLS REQUIRED




Jack Stands




Adjustable Wrench




18mm Socket



Torque Wrench



Jack




Tape Measure

ADJUSTABLE REAR UPPER CONTROL ARMS

SKU# 170107-459803

RSO SUSPENSION



1. Chock your front tires and then raise the rear tires off the ground using a properly rated jack and jack stands. Ensure the vehicle is properly supported then remove the rear tires.

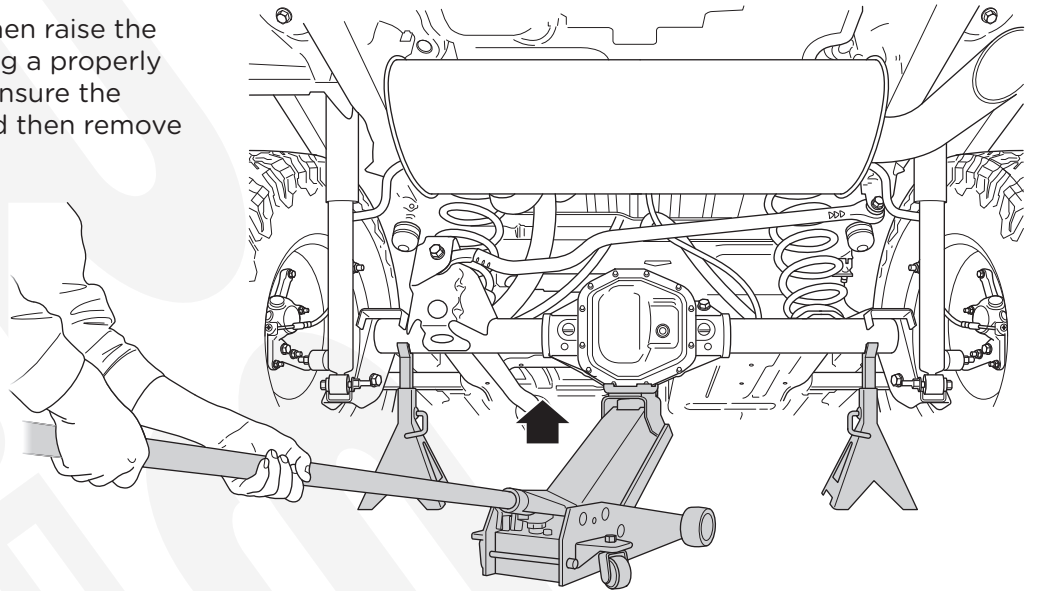

2. Use a hydraulic jack to raise the axle and remove any tension on the rear suspension. Use a 18mm socket to remove the factory hardware from the axle side and frame side of the control arm mounts. Retain the factory hardware as it will be reused for installation of the new RSO Adjustable Rear Upper Control Arms.

3. Before placing control arms in mounting position, you'll need to adjust them to our suggested base length. For 2.5" and 4" Lifts we recommend 18.5". Leave the jam nut loose and place the RSO control arms into the axle side and frame side control arm mounts. Loosely attached the factory hardware but do not torque down until all adjustments are completed.

4. The Adjustable Rear Upper Control Arms should be positioned to where the bend in the arm goes towards the inside of the vehicle. The fixed end will mount to the axle while the adjustable end will be attached to the frame mount. Hand tighten the original hardware to mount each end of the control arms. Once both control arms have been properly installed, lower the vehicle to the ground until the coil springs are supporting the full weight of the vehicle. Hand tighten the factory control arm mounting bolts and do not torque until all adjustments are final.

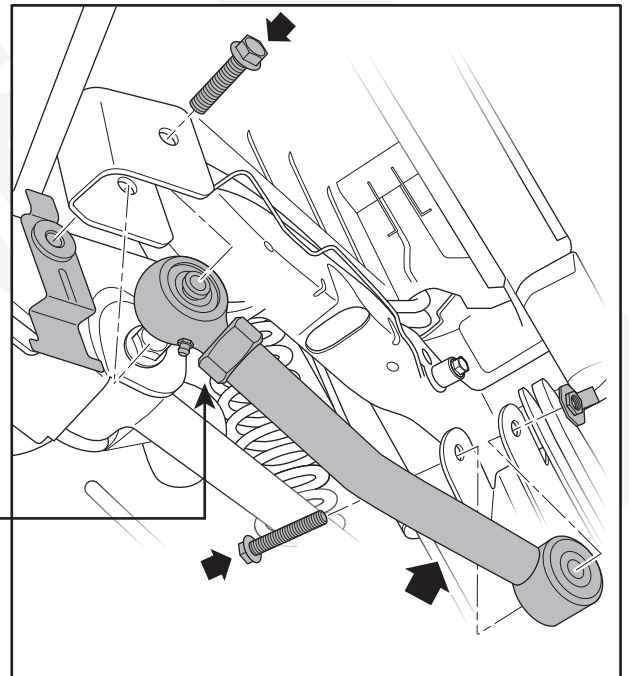

ADJUSTABLE REAR UPPER CONTROL ARMS

SKU# 170107-459803

RSO
SUSPENSION

5. Measure both sides of the vehicle to ensure the axle position matches. Measure the caster and pinion angle to ensure it is within factory specs, you can adjust the length of the control arms to get more or less caster and pinion angle as well as centering the axle in the wheel well. Once you have determined caster, pinion angle and axle position are within spec, tighten the jam nut using a large adjustable wrench and torque to 55ft/lbs. With the vehicle still on the ground supporting it's own weight use a 18mm socket and wrench to torque the frame side and axle side hardware to 125ft/lbs.
6. We now recommend a professional alignment. Check all hardware after 100 miles of driving and retorque as necessary.

REGULAR MAINTENANCE SCHEDULE

Control Arms are essentially maintenance free, however the bushings and the ball and socket joints are a consumable component. See Signs of Wear below for more information.

For the bushings, a visual inspection at every oil change is recommended to detect any accumulation of dirt or debris.

For the ball and socket joints, a visual inspection at every oil change is recommended to detect any accumulation of dirt, debris or moisture.

CLEANING & LUBRICATION

Should dirt accumulate on the bushings, wipe clean with a rag.

We recommend regreasing the joints every 10,000 miles.

SIGNS OF WEAR

Excessive back and forth play or rattling in the bushings and/or joints indicates wear. In such instances, it is imperative to replace the affected parts promptly. You can order replacement parts at www.cyc-engineering.com

Replacement Part numbers for this particular SKU are listed below for your reference.

SKU: REP-BUSHING-9-KIT (Replacement Rubber Bushings)

SKU: REP-BNSJOINT-3-KIT (Replacement Ball & Socket Joints)

TECHNICAL NOTES

INSTALLATION NOTES

PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED!


If you intend to do this installation yourself, please use extreme caution when working under a vehicle that is supported with jack stands. Serious injury or death can occur.

Read through entire installation manual to ensure that you understand all of the steps before proceeding with installation. If these instructions are not properly followed, severe frame, suspension, and tire damage may occur. Product failure or vehicle damage caused by improper installation will not be covered under warranty!

Remove all contents from the package and inspect for any damage. Also, verify that all components listed are included before you begin installation. If anything is missing or damaged please contact us at customerservice@cyc-engineering.com - IMPORTANT: DO NOT INSTALL DAMAGED PARTS!

COMPONENTS


Qty 2: Adjustable Rear Lower Control Arms

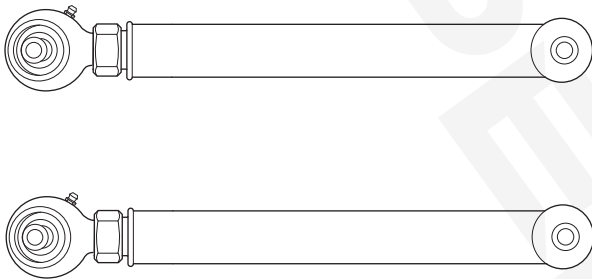


TOOLS REQUIRED




Jack Stands




Adjustable Wrench




21mm Socket



Torque Wrench



Jack




Tape Measure

ADJUSTABLE REAR LOWER CONTROL ARMS

SKU# 170107-459804

RSO SUSPENSION



1. Chock your front tires and then raise the rear tires off the ground using a properly rated jack and jack stands. Ensure the vehicle is properly supported then remove the rear tires.

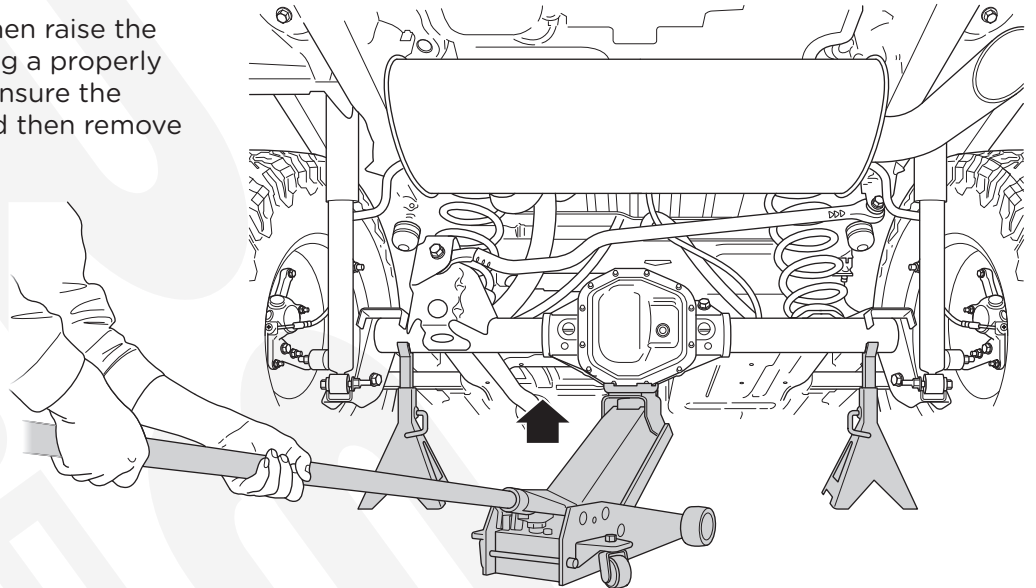

2. Use a hydraulic jack to raise the axle and remove any tension on the rear suspension. Use a 21mm socket to remove the factory hardware from the axle side and frame side of the control arm mounts. Retain the factory hardware as it will be reused for installation of the new RSO Adjustable Rear Lower Control Arms.

3. Before placing control arms in the mounting position, you'll need to adjust them to our suggested base length. For 2.5" and 4" Lifts we recommend 20.5". Leave the jam nut loose and place the RSO control arms into the axle side and frame side control arm mounts. Loosely attach the factory hardware but do not torque down until all adjustments are completed.

4. The Adjustable Rear Lower Control Arms should be positioned to where the fixed end will mount to the axle while the adjustable end will be attached to the frame mount. Hand tighten the original hardware to mount each end of the control arms. Once both control arms have been properly installed, lower the vehicle to the ground until the coil springs are supporting the full weight of the vehicle. Hand tighten the factory control arm mounting bolts and do not torque until all adjustments are final.

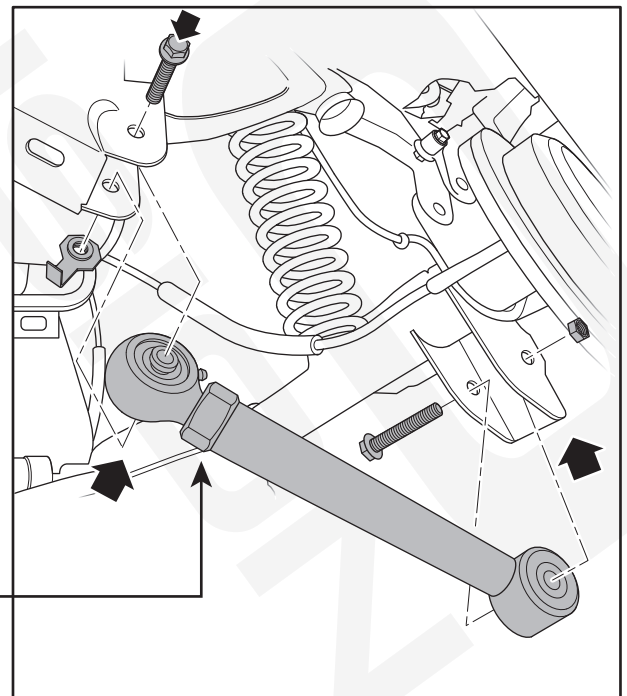

ADJUSTABLE REAR LOWER CONTROL ARMS

SKU# 170107-459804

RSO
SUSPENSION

5. Measure both sides of the vehicle to ensure the axle position matches. Measure the caster and pinion angle to ensure it is within factory specs, you can adjust the length of the control arms to get more or less caster and pinion angle as well as centering the axle in the wheel well. Once you have determined caster, pinion angle and axle position are within spec, tighten the jam nut using a large adjustable wrench and torque to 75ft/lbs. With the vehicle still on the ground supporting it's own weight use a 21mm socket and wrench to torque the frame side and axle side hardware to 125ft/lbs.
6. We now recommend a professional alignment. Check all hardware after 100 miles of driving and retorque as necessary.

MAINTENANCE GUIDE

SKU# 170107-459804

RSO
SUSPENSION

REGULAR MAINTENANCE SCHEDULE

Control Arms are essentially maintenance free, however the bushings and the ball and socket joints are a consumable component. See Signs of Wear below for more information.

For the bushings, a visual inspection at every oil change is recommended to detect any accumulation of dirt or debris.

For the ball and socket joints, a visual inspection at every oil change is recommended to detect any accumulation of dirt, debris or moisture.

CLEANING & LUBRICATION

Should dirt accumulate on the bushings, wipe clean with a rag.

We recommend regreasing the joints every 10,000 miles.

SIGNS OF WEAR

Excessive back and forth play or rattling in the bushings and/or joints indicates wear. In such instances, it is imperative to replace the affected parts promptly. You can order replacement parts at www.cyc-engineering.com

Replacement Part numbers for this particular SKU are listed below for your reference.

SKU: REP-BUSHING-3-KIT (Replacement Rubber Bushings)

SKU: REP-BNSJOINT-2-KIT (Replacement Ball & Socket Joints)

TECHNICAL NOTES